# **Built-in Flex Fireplaces**



# **Flex Island**








## ecosmartfire.com

## **Built-in Flex Fireplaces**



# Flex Island Design features

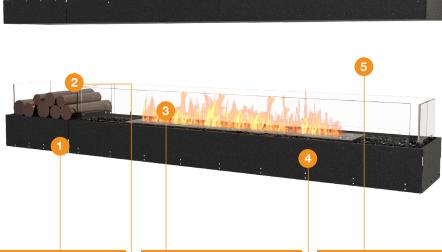

## **Included Accessories**



Jerry Can with Safety Spout & e-NRG bottle adaptor



## Lighting Rod & Lighter



XL Baffles (XL Burners Only)



Black Glass Charcoal\*



**Glass Fire Screen/s** 

### **Optional Accessories**



**Decorative Steel Logs**\*

Disclaimer. All product specifications and data may other disclosure relating to any product. MGG disclaims any and all liability or any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MGG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum edent permitted by law. The product specifications do not expand all liability for any errors, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or esulting form such use or sale. Please contact authorised personnel from MDG to obtain written terms and conditions regarding products designed for such applications. Images are indicative only.

## 1. Zero Clearance

Self-contained, zero clearance construction allows your Flex fireplace to be framed into wood or metal studs, providing installation freedom and flexibility for builders, architects, interior designers, landscapers and homeowners.

### 2. Decorative Side Box

Customise your fireplace design with a decorative box placed on one or more sides, and fill with your chosen noncombustible accessory.

#### **Built to Last a Lifetime**

Zinc sealed steel construction powder coated with super hi-temp black paint prevents rusting so all fireplaces can be used both indoors or outdoors.

## Quick and Easy Installation

Requiring virtually no assembly, Flex Fireplaces are designed to be placed into the desired location, safely secured into position, and operated immediately.

## 3. Glass Fire Screen/s

The toughened glass fire screen stabilises the flame in windy conditions. The Integrated windscreen sits flush behind the frame.

## **No Connections**

Light up outdoor spaces with a soft, alluring glow - easily and efficiently, without cumbersome connections.

#### 4. Colours

Available in a timeless black finish, Flex Fireplaces come with Stainless Steel or Black burners.



5. Room Divider Application Four-sided fireplaces feature four open sides - view the flame from the front, back

flame from the front, back and sides.

## No Flue, No Chimney, No Vent

Fuelled by clean-burning e-NRG bioethanol, our burners produce a beautiful orange flame without any smoke, soot or ash.

## Forefront of Fireplace Technology

Backed by 17 years of research and development, and third-party certification, each model in the Flex series features world-class safety and fuel ignition technologies.

## **Global Compliance**

These models comply with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.

\*Decorative media is not to be placed directly on top of the burner or anywhere they can interfere with the operation of the burner or the stability of flame.

© Copyright 2004 - 2022 N



# Flex 104IL Specifications

Burner Ventilation and Efficiency*					Construction		
							$\longleftrightarrow$
Flex Model	Compatible Burner	Fuel Capacity	Heats on Average (Indoors)	Approx. Burn Time	Minimum Room Size	Viewing Area Size	Minimum Wall Length
104IL	XL1200 x 2	10 L [2.6 Gals] x 2	Over 130 m <sup>2</sup> [1,400 ft <sup>2</sup> ]	9 - 14 hours	230 m <sup>3</sup> [8,122 ft <sup>3</sup> ]		
104IL.BX1	XL900 x 2	9 L [2.4 Gals] x 2	Over 120 m <sup>2</sup> [1,290 ft <sup>2</sup> ]	8 - 13 hours	220 m <sup>3</sup> [7,768 ft <sup>3</sup> ]	2,645mm [104in]	2,855mm [112in]
104IL.BX2	XL1200	10 L [2.6 Gals]	Over 65 m² [700 ft²]	9 - 14 hours	115 m³ [4,061 ft³]		
Awards	2020 BIMsmith Best Award (USA) 2018 Attendees Choice Award (USA)				-		
Application	Indoor & Outdoor					holestentid With the solids	modultuntint
Surround Colour	Black			Flex 104IL			
Burner Colours Options	Stainless Steel Black						
Materials	Mild Steel (Zinc Sealed) Hi-temp Powder-coat, Toughened Glass, Grade 304 Stainless Steel Burner, with optional Black Ceramic Coating			Flex 104IL.BX1			
Approx. Weight	<b>104IL</b> 116.3kg [255.9lbs] <b>104IL.BX1</b> 116.3kg [255.8lbs] <b>104IL.BX2</b> 104.8kg [230.6lbs] Weight includes burner/s, black glass charcoal, fire screen.					Flip D	
	e-NRG Bioethanol / e-NRG.com						

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

These models comply with existing standards in the USA, Europe, UK and Australia. O-TL listed to UL1370, EN 16647 BSI Certified and ACCC Safety Mandate compliant.


## FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum edent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicated review only.

Flex 104IL.BX2

## Flex 104IL

Physical model dimensions should be verified against cut out dimensions BEFORE installation begins to confirm tolerances align.

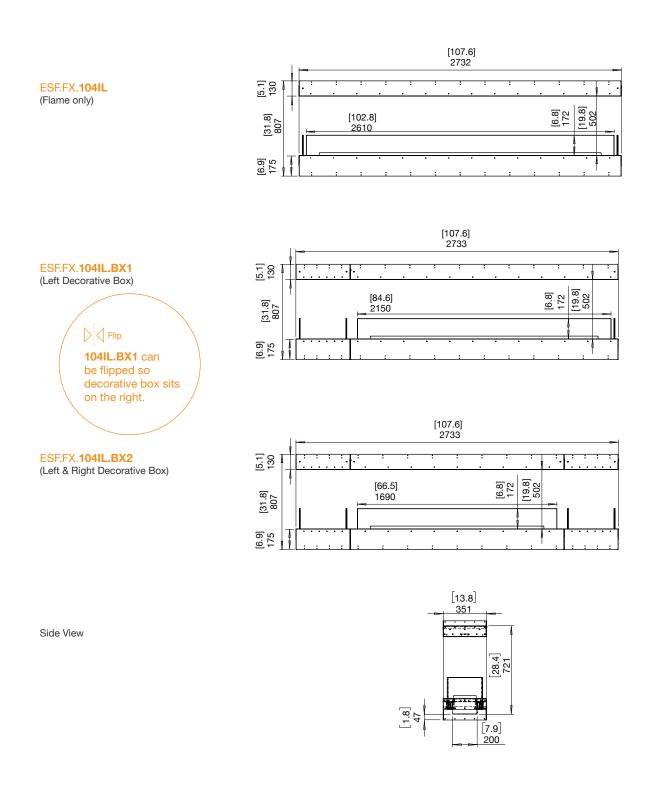

## FOR MORE INFORMATION PLEASE REFERENCE THE CLEARANCE & INSTALLATION MANUAL

Disclaimer. All product specifications and data are subject to change without notice and believed to be correct at the time of publication. MAD Design Group (MDG), its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "MAD Design Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product. MDG disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify MDGs terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of MDG. Customers using or applications. Images are indicative only.

ecosmar+™ Fire